


AS-U2.5G

USB Type-C 2.5G Ethernet Adapter

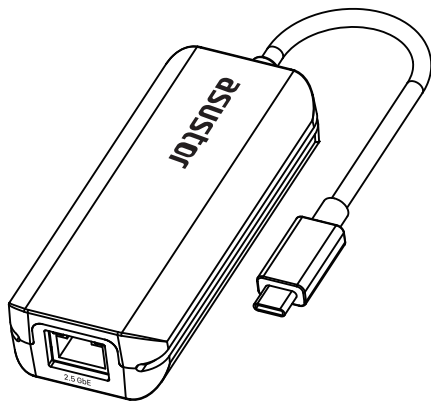

Quick Installation Guide

Overview:

The AS-U2.5G is a USB Type-C Ethernet adapter designed for Ultrabooks™, mobile devices and USB Type-C-enabled devices. Take advantage of up to 2.5-Gigabit Ethernet on almost any computer supporting a standard USB Type-C port. The AS-U2.5G also supports 10/100/1000 networks LEDs to signal the connection speed. The AS-U2.5G can also be used connect to the Internet, is portable, plugs and plays easily and is bus-powered, making the AS-U2.5G a great companion to devices that are not easily upgradeable.

Content:

- AS-U2.5G 2.5-Gigabit USB Type-C Ethernet Adapter
- Quick Installation Guide

Troubleshooting:

Issue 1: No network connection.

A: Please check the device as follows below:

1. Ensure all cable connections are securely fastened and connected to the correct ports.
2. Ensure that the green and orange LEDs are lit when connected to a network. Unlit LEDs may indicate network issues.
3. Ensure the USB Ethernet Adapter has received the correct IP address from your network. If not in DHCP mode, contact your network administrator for proper IP settings.

Issue 2: No internet connection.

A: Please check the device as follows below:

1. Ensure that the green and orange LEDs are lit when connected to a network. Unlit LEDs may indicate network issues.
2. Verify that the network adapter as received the proper IP address.
3. Ensure DNS settings are correct.

FAQ:

Q1. Does it matter which way I insert the AS-U2.5G into the USB port?

A: No. The adapter uses USB-C, which is reversible. USB-C no longer requires three attempts to plug in.

Q2. What if I only have traditional USB Type-A ports?

A: Passive USB Type-C to USB Type-A adapters, sold separately, are compatible with the AS-U2.5G. Ensure that the adapter is USB 3.x certified.


Features:

- Converts USB Type-C to a standard RJ45 2.5-Gigabit port.
- LED signals to display connection status.
- Supports ASUSTOR ADM, Windows, macOS, Linux.
- Plug and play, automatically installs drivers.
- Bus powered. Does not need external power.
- CE and FCC certified.
- Meets RoHS standards.

First-time setup:

The AS-U2.5G supports ASUSTOR ADM 3.4 and up, Windows XP and up, macOS 10.6 and up, Linux kernel 2.6 and above. ADM, Windows, macOS have the driver built in and will automatically install the device when plugged in for the first time. Various Linux distributions may or may not include the driver, manual installation of the driver may be required. DHCP (Dynamic Host Configuration Protocol) is the default setting for the driver, which is compatible with most networks. Other settings can also be manually changed.

LED Indicators:



#	Color	Function	Description
①	Green	Data Transfer Network Connection	Blinking: Transferring at 10/100/1000 speeds. On: Working as intended.
②	Orange	Data Transfer Network Connection	Blinking: Transferring at 2.5-Gigabit speeds. On: Working as intended.

Spec:

Model Number	AS-U2.5G
Description	2.5-Gigabit USB Type-C Ethernet Adapter
Input Interface	USB 3.2 Type-C
Output Interface	10/100/1000/2500 Autodetect Female RJ45 Ethernet port
Power	USB 5V
Material	ABS Plastic
OS Support	Windows® /XP/Vista/7/8.x/10 and up (32 and 64 bit) Windows Server® 2003/2008R2/2012R2 Mac OS® 10.6 and up Linux 2.6.x and up ASUSTOR ADM 3.4 and up
Operating Environment	Operating Temperature: 0°C-60°C (32-140°F) Operating Humidity: < 85% No condensation Non-Operating Temperature: -10°C-85°C (14-176°F)
Certification	CE, FCC, RoHS
Dimensions	96(L) x 40(W) x 21(H) mm
Cable	USB-C 150mm