

# **HUAWEI IdeaHub**

### Intelligence at Your Fingertips

IdeaHub Pro 65" 86" IdeaHub S 65" 86"




Superb Interactive Whiteboard Professional Video Conferencing

and I

Prosperous Cloud Ecosystem

Incorporating interactive whiteboard, UHD projection, video conferencing and open office AppGallery, Huawei IdeaHub series is your new option for smart office in meeting room, open office, executive boardroom, home office and many other scenarios.

### Various Application Scenarios

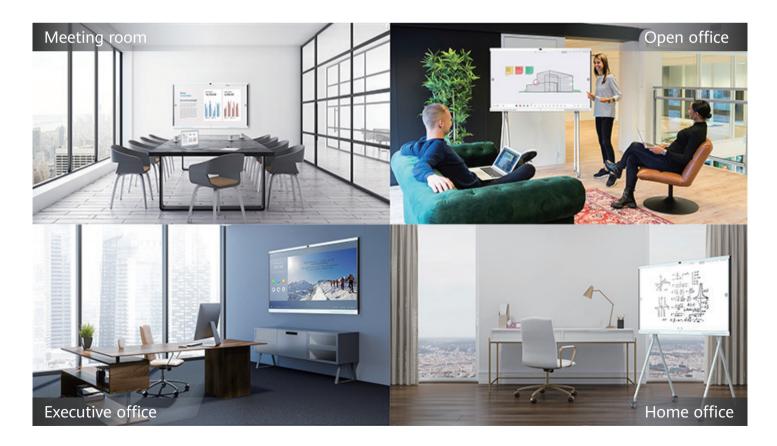

### **Product Highlights**



#### **Elegant Simplicity**

- Modern user-centric design
- Gentle jade white frame
- Slender artistic stand

#### 4K UHD Projection for Better User Experience

- Smoother projection with 60 fps
- Higher-definition images and 4K H.265
- More accurate mouse-pointing and ultra-low cursor latency





#### Superb Interactive Whiteboard with Ultra-low Latency

- Ultra-low writing latency and smooth writing experience
- One tap to send minutes to your mailbox for higher efficiency

#### **Cloud Meeting Support, Easy to Use**

- Support 3rd party cloud meeting service (OPS module required)
- High network adaptability, 30% PLC for video, and 80% PLC for audio



### **Product Highlights**



#### Native 4K & Al for Better Meeting Experience

- H.265 HD video and 4K content sharing
- Flexible layout with SVC multistream
- Auto-Framing
- Speaker tracking: automatically tracks the speaker and displays the close-up shot \*

#### **Open Ecosystem, Enormous Apps**

- Popular apps pre-installed and customizable homepage
- Huawei appGallery with a rich store of HD apps
- Private application portal and web app distribution





#### **Bulletin Board**

- Company culture demonstration
- Real-time release of the company internal information in the bulletin
- Hierarchical content management for customization based on scenarios

#### **Open Software and Hardware for Industry Applications**

- Windows platform extension, OPS: optional extension module for Windows
- Open SDK: allows 3rd-party to use hardware and audiovisual capability



# **Technical Specifications**

| <b>Technical Specificatio</b>             | ns−1  |                        |                        |             |  |
|---|---|------------------------|------------------------|-------------|--|
| Model                                     | IdeaHub Pro IdeaHub   |                        | b S                    |             |  |
| Screen size                               | 65"   | 86"                    | 65"                    | 86"         |  |
| Components                                |   |                        |                        |             |  |
| Main body                                 | 0   | Codec, camera, microph | none array, and speake | r           |  |
| Stylus (pen)                              | 2   |                        |                        |             |  |
| Wall-mounted bracket                      | √(optional)   | √(included)            | √(optional)            | √(included) |  |
| Rolling stand                             | √(optional)   | ×                      | √(optional)            | ×           |  |
| Cables                                    | Network cables and power cables   |                        |                        |             |  |
| Touch (tablet)                            | √(optional)   | √(optional)            | √(optional)            | √(optional) |  |
| IdeaShare                                 | √(optional)   |                        |                        |             |  |
| System                                    |   |                        |                        |             |  |
| CPU                                       | Dual-chip 4-core@1.5 GHz + 4-core@1.8 GHz   |                        |                        |             |  |
| RAM                                       | 12GB  |                        |                        |             |  |
| Flash                                     | 64GB  |                        |                        |             |  |
| Al computing power                        | 4T FLOPS  |                        |                        |             |  |
| Screen                                    |   |                        |                        |             |  |
| Screen type                               | E-LED   | D-LED                  | E-LED                  | D-LED       |  |
| Resolution                                |   | 4                      | K                      |             |  |
| Refresh rate                              |   | 60                     | Hz                     |             |  |
| Precision                                 | ± 1mm   |                        |                        |             |  |
| Multi-touch                               | 20 points   |                        |                        |             |  |
| Anti-reflection and glare                 | $\checkmark$  |                        |                        |             |  |
| Adaptive brightness                       |   | √                      | 1                      |             |  |
| Camera                                    |   |                        |                        |             |  |
| Resolution                                | 4K30  | 4K30                   | 1080p30                | 1080p30     |  |
| Auto voice tracking                       | √   | √                      | ×                      | ×           |  |
| AutoFrame                                 |   | ١                      | /                      |             |  |
| Ultra-wide angle                          | 80°   |                        |                        |             |  |
| Anti-fog, dust-proof,<br>and anti-flicker | $\checkmark$  |                        |                        |             |  |
| Zoom                                      | 2 x digital zoom  |                        |                        |             |  |
| Speakers                                  |   |                        |                        |             |  |
| Frequency domain                          | 100Hz ~ 22KHz   |                        |                        |             |  |
| Quantity                                  | 4   |                        |                        |             |  |
| Stereo audio                              | $\checkmark$  |                        |                        |             |  |
| Microphones                               |   |                        |                        |             |  |
| Sound pickup distance                     |   | 8                      | m                      |             |  |
| Sound pickup angle                        | 180° forward  |                        |                        |             |  |
| Quantity                                  | 12  |                        |                        |             |  |
| Frequency domain                          | 100Hz ~ 20KHz   |                        |                        |             |  |
| Enhanced functions                        | Echo cancellation, noise suppression, auto gain control, and external microphones |                        |                        |             |  |

## **Technical Specifications**

| Technical Specifications-2        |   |                    |                   |                    |  |  |
|-----------------------------------|---|--------------------|-------------------|--------------------|--|--|
| Model                             | IdeaHub I   | Pro                | IdeaHu            | ıb S               |  |  |
| Screen size                       | 65"   | 86"                | 65"               | 86"                |  |  |
| Ports                             |   |                    |                   |                    |  |  |
| Video input ports                 | 1 x built-in camera<br>1 x HDMI (4K 30 fps), 1 x HDMI (1080p 60 fps, external cameras)<br>1 x optional OPS input (4K 30 fps)                |                    |                   |                    |  |  |
| Video output ports                | 1 x built-in LCD<br>1 x HDMI (1080p 60 fps)   |                    |                   |                    |  |  |
| Audio input ports                 | 1 x built-in microphone array<br>1 x 3.5 mm LINE IN<br>1 x HD-AI<br>1 x OPS input (optional)<br>1 x HDMI (audio input, conflicted with OPS) |                    |                   |                    |  |  |
| Audio output ports                | 1 x built-in speaker<br>1 x 3.5 mm LINE OUT<br>1 x HDMI (audio output)  |                    |                   |                    |  |  |
| Other ports                       | 2 x USB 3.0 Type-A<br>1 x USB 2.0 Type-B<br>1 x RJ45 (10/100/1000 Mbit/s LAN)<br>1 x RJ45 (for Touch)                                       |                    |                   |                    |  |  |
| Wi-Fi                             |   | 2.4 GHz a          | nd 5 GHz          |                    |  |  |
| Bluetooth                         | $\checkmark$  |                    |                   |                    |  |  |
| Electricity Supply Require        | ments   |                    |                   |                    |  |  |
| Rated operating voltage           |   | 100V ~ 2           | 240V AC           |                    |  |  |
| Operating frequency               |   | 50Hz ~             | ~ 60Hz            |                    |  |  |
| Max. power                        | 350 W   | 450 W              | 350 W             | 450 W              |  |  |
| Environment Requirement           | ts  |                    |                   |                    |  |  |
| Noise                             |   | ≤ 46dE             | BA SPL            |                    |  |  |
| Altitude                          | < 5000 m  |                    |                   |                    |  |  |
| Temperature                       | IdeaHub: 0°C to 40°C, Touch: 0°C to 35°C (operating state)<br>-20°C to + 60°C (non-operating state)   |                    |                   |                    |  |  |
| Relative humidity                 | 10% to 90% (operating state)<br>5% to 95% (non-operating state)   |                    |                   |                    |  |  |
| Recommended illuminance           | > 200 lux   |                    |                   |                    |  |  |
| Min. illuminance                  | 7Lux  |                    |                   |                    |  |  |
| Certification                     |   |                    |                   |                    |  |  |
| Regulatory compliance             | CCC, CE (RoHS, REACH, and WEEE), VCCI, Network Access License of MIIT,<br>and Radio Type Approval Certification                             |                    |                   |                    |  |  |
| <b>Dimensions and Weight</b>      |   |                    |                   |                    |  |  |
| Package dimensions<br>(H x W x D) | 1720×1114×246mm   | 2236×1404×356mm    | 1720×1114×246mm   | 2236×1404×356mm    |  |  |
| Product dimensions<br>(H x W x D) | 1492.5×931.1×71mm   | 1963.8×1195.1×95mm | 1492.5×931.1×71mm | 1963.8×1195.1×95mm |  |  |
| Gross weight                      | 63kg  | 110kg              | 63kg              | 110kg              |  |  |
| Net weight                        | 50kg  | 90kg               | 50kg              | 90kg               |  |  |

Note: The dimensions and weight may vary with configuration, manufacturing process, and measurement method.

# **Technical Specifications**

| <b>Technical Specificatio</b>     | ns−3  |   |  |  |  |
|-----------------------------------|---|---|--|--|--|
| Model                             | IdeaHub Pro   | IdeaHub S   |  |  |  |
| Screen size                       | 65" 86"   | 65" 86"   |  |  |  |
| Communications Protocol           | s   |   |  |  |  |
| Multimedia framework<br>protocols | ITU-T H.323 and IETF SIP  |   |  |  |  |
| Audio codec protocols             | AAC-LD mono/stereo, G.711A,   | G.711U, G.722, G.722.1C, and OPUS   |  |  |  |
| Video codec protocols             | H.265, H.264 SVC, H.264 HP, and H.264 BP  |   |  |  |  |
| Network transmission protocols    | TCP/IP, RTP, RTCP, DHCP, DNS, SMTP, SNMP, SNTP, Telnet, SSH,<br>HTTP, HTTPS, and TR-069   |   |  |  |  |
| Dual-stream protocols             | ITU-T H.239 and BFCP  |   |  |  |  |
| Other communications protocols    | H.225, H.235, H.241, H.245, H.281, H.460, RFC2833, LDAP, and LDAPS  |   |  |  |  |
| Wi-Fi standards                   | IEEE 802.11 a/b/g/n/ac/w, IEEE 802  | 2.1x, WPA2, Wi-Fi AP, and station mode  |  |  |  |
| IP protocols                      | IPv4 and  | IPv6 dual stack   |  |  |  |
| <b>Conference Specifications</b>  |   |   |  |  |  |
| Conferencing mode                 | Native  | conferencing  |  |  |  |
| Codec                             | H.265 1080p hardware codec  |   |  |  |  |
| Video resolutions                 | Min. H.264 bandwidth<br>1080p 30 fps<br>720p 60 fps<br>720p 30 fps<br>Min. H.265 bandwidth<br>1080p 30 fps<br>720p 60 fps   | Min. bandwidth: 512 Kbit/s<br>Min. bandwidth: 768 Kbit/s<br>Min. bandwidth: 384 Kbit/s<br>Min. bandwidth: 384 Kbit/s<br>Min. bandwidth: 512 Kbit/s  |  |  |  |
| Content resolutions               | 720p 30 fps<br>Input:<br>1920 × 1080 24/25/30/50/60 fps<br>1920 × 1200 60 fps<br>3840 × 2160 25/30/50/60 fps<br>Output:<br>1920 × 1080<br>3840 × 2160<br>Codec resolutions:<br>1080p (1920 × 1080)<br>1920 × 1200<br>4K (3840 × 2160) | Min. bandwidth: 256 Kbit/s<br>Input:<br>1920 × 1080 24/25/30/50/60 fps<br>1920 × 1200 60 fps<br>3840 × 2160 25/30/50/60 fps<br>Output:<br>1920 × 1080<br>Codec resolutions:<br>1080p (1920 x 1080)<br>1920 x 1200 |  |  |  |
| Dual-stream resolutions           | Video conferencing:<br>1080p 30 fps + 1080p 30fps<br>1080p 30 fps + 4K 8 fps<br>Data conferencing:<br>1080p 30 fps<br>4K 8 fps  | Video conferencing:<br>1080p 30 fps + 1080p 30 fps<br>Data conferencing:<br>1080p 30 fps  |  |  |  |
| AI                                | Speaker tracking, Acoustic baffle,<br>and Auto Framing  | Acoustic baffle and Auto Framing  |  |  |  |
| Languages                         | Simplified Chinese, traditional Chinese, English, Spanish (Europe), French,<br>Russian, Japanese, German, and Portuguese (Brazil)   |   |  |  |  |
| Security                          | Embedded encryption chip that supports H.235, STARTTLS, TLS, SRTP encryption, and Chinese cryptographic algorithms  |   |  |  |  |

### **Subscription Information**

| Product Name   | Appearance | Remarks  |
|--|------------|--|
| HUAWEI IdeaHub Pro 65<br>HUAWEI IdeaHub Pro 86<br>HUAWEI IdeaHub S 65<br>HUAWEI IdeaHub S 86 | 5112,9256  | _  |
| Mount  | Appearance | Remarks  |
| Rolling Stand  |            | Optional for 65" model                           |
| Wall Mount Bracket   |            | Included for 86" model<br>Optional for 65" model |
| Optional Accessories   | Appearance | Remarks  |
| IdeaShare  |            | -  |
| CloudLink Touch  |            | _  |

#### Learn More>>>

Enterprise Collaboration Website



#### Copyright $\ensuremath{\mathbb{C}}$ Huawei Technologies Co., Ltd. 2020. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without the prior written consent of Huawei Technologies Co., Ltd.

#### **Trademarks and Permissions**

**W** HUAWEI, HUAWEI, and **W** are trademarks or trade names of Huawei Technologies Co., Ltd. All other trademarks, product names, service names, and company names mentioned in this document are the property of their respective holders.

#### Disclaimer

The technical specifications described in this document include but are not limited to parameters and performance indicators and vary depending on the actual release. This document does not constitute a warranty of any kind, expressed or implied. Huawei may update relevant information from time to time. Huawei reserves the right to update or correct the information about related products or solutions. Updates are described in detail in the latest release notes or introduction.

Huawei Technologies Co., Ltd. Huawei Industrial Base, Bantian, Longgang Tel: +86 755 28780808 Postal code: 518129

Updated: April 2020

www.huawei.com