Getac



ZX70-EX FULLY RUGGED TABLET

- Qualcomm[®] Snapdragon[™] 660, Octa-core Processor
- Verified as Android Enterprise Recommended vi
- 7" LumiBond® Display with Getac Sunlight Readable Technology and Glove-enabled Capacitive Touchscreen
- 6 Feet Drop , MIL-STD-810H and IP67 Certified
- Optional Barcode Reader and HF RFID
- ATEX & IECEx Explosive Atmosphere Certified














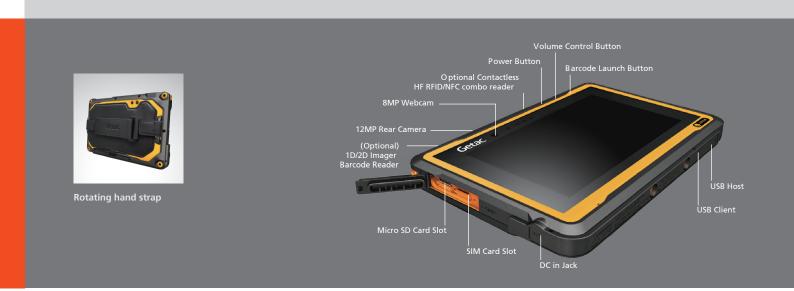

Specifications

Operating System

Android™ 10.0

Mobile Computing Platform

Qualcomm[®] Snapdragon[™] 660, Octa-core 1.95 GHz, burst up to 2.2 GHz

VGA Controller

Qualcomm® Adreno™ 512 GPU

Display

7" IPS TFT LCD HD (1280 x 720) Anti-static protection film LumiBond® display with Getac sunlight readable Capacitive multi-touch screen

Storage & Memory

4GB LPDDR4

64GB eMMC

Keyboard Power button

3 tablet programmable buttons

Pointing Device

Touchscreen

Capacitive multi-touch screen

I/O Interface

8M pixels webcam x 1 12M pixels auto focus rear camera x 1 DC in Jack x 1 USB 2.0 (Host) x 1 MicroUSB 2.0 (Client) x 1 MicroSD x1

Communication Interface

Wi-Fi 802.11ac Bluetooth (v5.0) Dedicated GPS

Optional: 4G LTE mobile broadband

Security Feature

Optional: Contactless HF RFID / NFC combo reader ii,iii Optional: Barcode reader

Power

AC adapter (25W, 100-240VAC, 50 / 60Hz) Li-lon battery (3.8V, typical 8480mAh; min.

Dimension (W x D x H) & Weight

218 x 142 x 27 mm (8.58 " x 5.6" x 1.08") 762g (1.68lbs) ^{iv}

Rugged Feature

MIL-STD-810H certified IP67 certified Vibration & 6 feet (1.8m) drop resistant v ATEX & IECEx Certified

Environmental Specification

- Temperature $^{\text{V}}$: Operating: -21°C to 60°C / -6°F to 140°F Storage: -40°C to 71°C / -40°F to 160°F
- 95% RH , non-condensing

Explosion Protection

ATEX / IECEx Zone 2/22 Ex II 3G Ex ic op is IIC T5 Gc Ex II 3D Ex ic op is IIIB T100°C Dc

Pre-installed Software

Getac File Brower Getac Camera Getac Input Method DeployeXpress Client Getac Settings and Google Applications (Search, Chrome, Gmail, Maps, YouTube, Play, Drive, Play Music, Play Movies, Duo and Photos)

Accessories AC Adapter (25W; 12V/2A, 100-240VAC; 50 / 60 Hz) Capacitive Stylus

Pen holder Wrist Strap

Optional:

AC adapter (25W; 12V/2A, 100-240VAC; 50 / 60 Hz) Capacitive stylus Hand strap with Stylus Holder Wrist strap

Bumper-to-Bumper Warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs. Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

Standard

3 years Bumper-to-Bumper.

- Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is
- operating in the area.

 13.56MHz Contactless HF RFID / NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™

- compliant).

 iii HF RFID / NFC combo reader applies to US & EU

 iv Weight and dimensions vary from
 configurations and optional accessories.

 v Tested by an independent third-party test lab
 following MIL-STD-810H.

 vi Android Enterprise Recommended rugged
 devices deliver a consistent set of features
 verified by Google with an elevated device
 baseline, increased security standards and
 enterprise-focused features and behaviors to
 meet the needs of users. Google and Android meet the needs of users. Google and Android are trademarks of Google LLC.

ZX70-EX **Fully Rugged Tablet**



Getac

GETAC TECHNOLOGY CORPORATION
5F, Building A, No. 209, Section 1, Nangang Rd.,
Nangang Dist., Taipei City, 11568, Taiwan, R.O.C. Tel: +886 2 2785 7888 globalmarketing@getac.com | www.getac.com



Copyright © 2021 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved ation provided herewith is for reference only available specification shall be subjected to quotation by request. V01M03Y21WW